

Digital Signal Processing

Prof. Nizamettin AYDIN

naydin@yildiz.edu.tr

<http://www.yildiz.edu.tr/~naydin>

1

Digital Signal Processing

Lecture 4

Spectrum Representation

2

READING ASSIGNMENTS

- This Lecture:
 - Chapter 3, Section 3-1
- Other Reading:
 - Appendix A: Complex Numbers
 - Next Lecture: Ch 3, Sects 3-2, 3-3, 3-7 & 3-8

4

LECTURE OBJECTIVES

- Sinusoids with **DIFFERENT** Frequencies
 - **SYNTHESIZE** by Adding Sinusoids


$$x(t) = \sum_{k=1}^N A_k \cos(2\pi f_k t + \varphi_k)$$

- **SPECTRUM** Representation
 - Graphical Form shows **DIFFERENT** Freqs

5

FREQUENCY DIAGRAM

- Plot Complex Amplitude vs. Freq

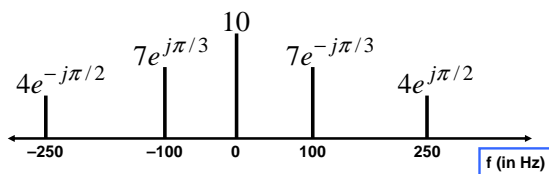

6

Another FREQ. Diagram

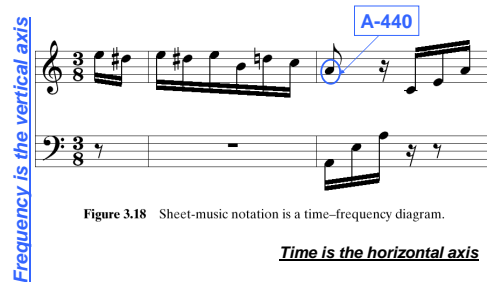


Figure 3.18 Sheet-music notation is a time-frequency diagram.


7

MOTIVATION

- Synthesize **Complicated** Signals
 - Musical Notes
 - Piano uses 3 strings for many notes
 - Chords: play several notes simultaneously
 - Human Speech
 - Vowels have dominant frequencies
 - Application: computer generated speech
 - Can all signals be generated this way?
 - Sum of sinusoids?

8


Fur Elise WAVEFORM

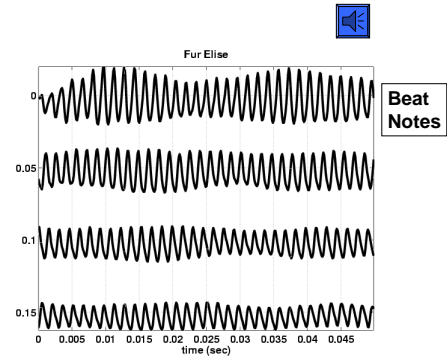

9

Speech Signal: BAT

- Nearly **Periodic** in Vowel Region
 - Period is (Approximately) $T = 0.0065$ sec

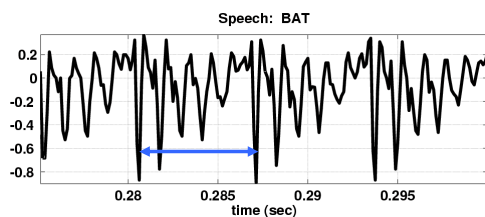

10

Euler's Formula Reversed

- Solve for **cosine** (or sine)

$$e^{j\omega t} = \cos(\omega t) + j \sin(\omega t)$$

$$e^{-j\omega t} = \cos(-\omega t) + j \sin(-\omega t)$$

$$e^{-j\omega t} = \cos(\omega t) - j \sin(\omega t)$$

$$e^{j\omega t} + e^{-j\omega t} = 2 \cos(\omega t)$$

$$\cos(\omega t) = \frac{1}{2}(e^{j\omega t} + e^{-j\omega t})$$

11

INVERSE Euler's Formula

- Solve for **cosine** (or sine)

$$\cos(\omega t) = \frac{1}{2}(e^{j\omega t} + e^{-j\omega t})$$

$$\sin(\omega t) = \frac{1}{2j}(e^{j\omega t} - e^{-j\omega t})$$

12

SPECTRUM Interpretation

- Cosine = sum of 2 complex exponentials:

$$A \cos(7t) = \frac{A}{2} e^{j7t} + \frac{A}{2} e^{-j7t}$$

One has a positive frequency
The other has **negative** freq.
Amplitude of each is half as big

13

NEGATIVE FREQUENCY

- Is negative frequency real?
- Doppler Radar provides an example
 - Police radar measures speed by using the Doppler shift principle
 - Let's assume 400Hz \leftrightarrow 60 mph
 - +400Hz means towards the radar
 - -400Hz means away (opposite direction)
 - Think of a train whistle

14

SPECTRUM of SINE

- Sine = sum of 2 complex exponentials:

$$A \sin(7t) = \frac{A}{2j} e^{j7t} - \frac{A}{2j} e^{-j7t}$$

$$= \frac{1}{2} A e^{-j0.5\pi} e^{j7t} + \frac{1}{2} A e^{j0.5\pi} e^{-j7t}$$

$$\frac{-1}{j} = j = e^{j0.5\pi}$$


- Positive freq. has phase = -0.5π
- Negative freq. has phase = $+0.5\pi$

15

GRAPHICAL SPECTRUM

EXAMPLE of SINE

$$A \sin(7t) = \frac{1}{2} A e^{-j0.5\pi} e^{j7t} + \frac{1}{2} A e^{j0.5\pi} e^{-j7t}$$

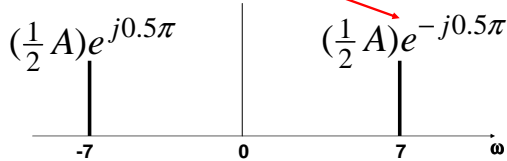


AMPLITUDE, PHASE & FREQUENCY are shown

16

SPECTRUM ---> SINUSOID

- Add the spectrum components:

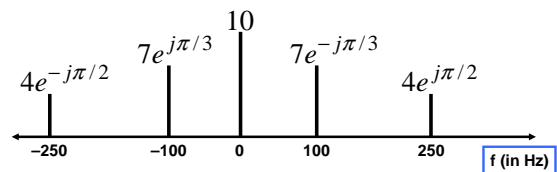

What is the formula for the signal x(t)?

17

Gather (A,omega,phi) information

- | | |
|----------------|---------------------|
| • Frequencies: | • Amplitude & Phase |
| - 250 Hz | - 4 $-\pi/2$ |
| - 100 Hz | - 7 $+\pi/3$ |
| - 0 Hz | - 10 0 |
| - 100 Hz | - 7 $-\pi/3$ |
| - 250 Hz | - 4 $+\pi/2$ |

Note the conjugate phase

DC is another name for zero-freq component
DC component always has $\phi=0$ or π (for real $x(t)$)

18


Add Spectrum Components-1

- | | |
|----------------|---------------------|
| • Frequencies: | • Amplitude & Phase |
| - 250 Hz | - 4 $-\pi/2$ |
| - 100 Hz | - 7 $+\pi/3$ |
| - 0 Hz | - 10 0 |
| - 100 Hz | - 7 $-\pi/3$ |
| - 250 Hz | - 4 $+\pi/2$ |

$$x(t) = 10 + 7e^{-j\pi/3} e^{j2\pi(100)t} + 7e^{j\pi/3} e^{-j2\pi(100)t} + 4e^{j\pi/2} e^{j2\pi(250)t} + 4e^{-j\pi/2} e^{-j2\pi(250)t}$$

19

Add Spectrum Components-2

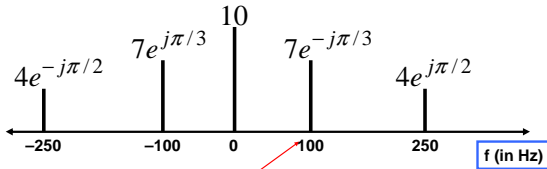

$$x(t) = 10 + 7e^{-j\pi/3}e^{j2\pi(100)t} + 7e^{j\pi/3}e^{-j2\pi(100)t} + 4e^{j\pi/2}e^{j2\pi(250)t} + 4e^{-j\pi/2}e^{-j2\pi(250)t}$$

20

Simplify Components

$$x(t) = 10 + 7e^{-j\pi/3}e^{j2\pi(100)t} + 7e^{j\pi/3}e^{-j2\pi(100)t} + 4e^{j\pi/2}e^{j2\pi(250)t} + 4e^{-j\pi/2}e^{-j2\pi(250)t}$$

Use Euler's Formula to get **REAL** sinusoids:

$$A \cos(\omega t + \phi) = \frac{1}{2} A e^{-j\phi} e^{j\omega t} + \frac{1}{2} A e^{-j\phi} e^{-j\omega t}$$

21

FINAL ANSWER

$$x(t) = 10 + 14 \cos(2\pi(100)t - \pi/3) + 8 \cos(2\pi(250)t + \pi/2)$$

So, we get the general form:

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi f_k t + \phi_k)$$

22

Summary: GENERAL FORM

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi f_k t + \phi_k)$$

$$x(t) = X_0 + \sum_{k=1}^N \Re\{X_k e^{j2\pi f_k t}\}$$

$$\Re\{z\} = \frac{1}{2} z + \frac{1}{2} z^*$$

$$X_k = A_k e^{j\phi_k}$$

Frequency = f_k

$$x(t) = X_0 + \sum_{k=1}^N \left\{ \frac{1}{2} X_k e^{j2\pi f_k t} + \frac{1}{2} X_k^* e^{-j2\pi f_k t} \right\}$$

23

Example: Synthetic Vowel

- Sum of 5 Frequency Components


f_k (Hz)	X_k	Mag	Phase (rad)
200	$(771 + j12202)$	12,226	1.508
400	$(-8865 + j28048)$	29,416	1.876
500	$(48001 - j8995)$	48,836	-0.185
1600	$(1657 - j13520)$	13,621	-1.449
1700	$4723 + j0$	4723	0

Table 3.1: Complex amplitudes for harmonic signal that approximates the vowel sound "ah".

24


SPECTRUM of VOWEL

- Note: Spectrum has $0.5X_k$ (except X_{DC})
- Conjugates in negative frequency

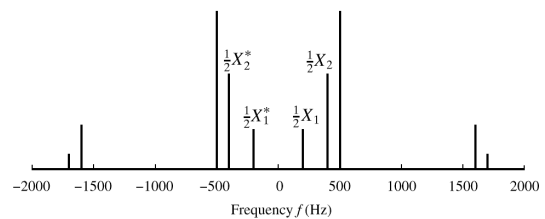

25

SPECTRUM of VOWEL (Polar Format)

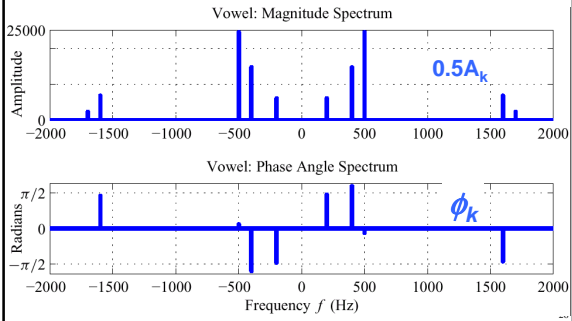

Vowel Wavefor (sum of all 5 components)

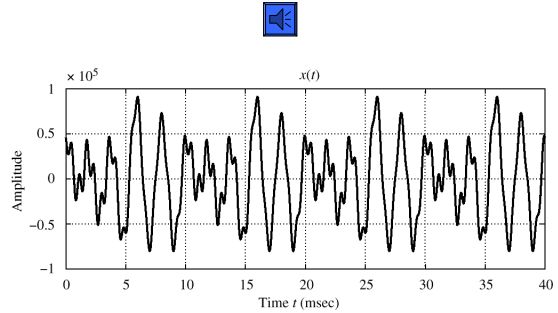


Figure 3.11 Sum of all of the terms in (3.3.4). Note that the period is 10 msec, which equals $1/f_0$.