

Digital Signal Processing

Prof. Nizamettin AYDIN

naydin@yildiz.edu.tr

<http://www.yildiz.edu.tr/~naydin>

1

Digital Signal Processing

Lecture 5

Periodic Signals, Harmonics & Time-Varying Sinusoids

2

License Info for SPFirst Slides

- This work released under a [Creative Commons License](#) with the following terms:
- Attribution
 - The licensor permits others to copy, distribute, display, and perform the work. In return, licensees must give the original authors credit.
- Non-Commercial
 - The licensor permits others to copy, distribute, display, and perform the work. In return, licensees may not use the work for commercial purposes—unless they get the licensor's permission.
- Share Alike
 - The licensor permits others to distribute derivative works only under a license identical to the one that governs the licensor's work.
- [Full Text of the License](#)
- *This (hidden) page should be kept with the presentation*


3

READING ASSIGNMENTS

- This Lecture:
 - Chapter 3, Sections 3-2 and 3-3
 - Chapter 3, Sections 3-7 and 3-8
- Next Lecture:
 - [Fourier Series ANALYSIS](#)
 - Sections 3-4, 3-5 and 3-6

4

Problem Solving Skills

- Math Formula
 - Sum of Cosines
 - Amp, Freq, Phase
 - Recorded Signals
 - Speech
 - Music
 - No simple formula
 - Plot & Sketches
 - $S(t)$ versus t
 - Spectrum
 - MATLAB
 - Numerical
 - Computation
 - Plotting list of numbers
- 

5

LECTURE OBJECTIVES

- Signals with **HARMONIC** Frequencies
 - Add Sinusoids with $f_k = kf_0$

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi k f_0 t + \varphi_k)$$

FREQUENCY can change vs. TIME


Chirps: $x(t) = \cos(\alpha t^2)$

Introduce Spectrogram Visualization (`specgram.m`) (`plotspec.m`)

6

SPECTRUM DIAGRAM


- Recall Complex Amplitude vs. Freq

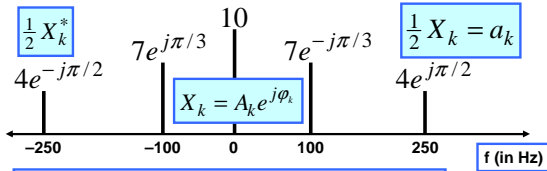

$$x(t) = 10 + 14 \cos(2\pi(100)t - \pi/3) + 8 \cos(2\pi(250)t + \pi/2)$$

SPECTRUM for PERIODIC ?

- Nearly Periodic in the Vowel Region
 - Period is (Approximately) $T = 0.0065$ sec

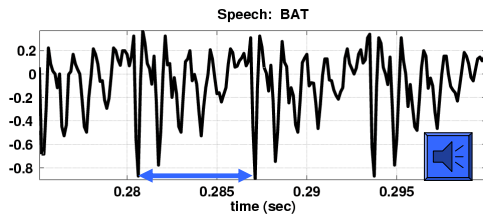

PERIODIC SIGNALS

- Repeat every T secs

- Definition

- Example:

$$x(t) = x(t + T)$$

$$x(t) = \cos^2(3t)$$

$$T = ?$$

- Speech can be "quasi-periodic"

$$T = \frac{2\pi}{3} \quad T = \frac{\pi}{3}$$

Period of Complex Exponential

$$x(t) = e^{j\omega t}$$

$$x(t + T) = x(t) ?$$

Definition: Period is T

$$e^{j\omega(t+T)} = e^{j\omega t}$$

$$e^{j2\pi k} = 1$$

$$\Rightarrow e^{j\omega T} = 1 \Rightarrow \omega T = 2\pi k$$

$$\omega = \frac{2\pi k}{T} = \left(\frac{2\pi}{T}\right)k = \omega_0 k$$

$k = \text{integer}$

Harmonic Signal Spectrum

Periodic signal can only have: $f_k = k f_0$

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi k f_0 t + \phi_k) \quad f_0 = \frac{1}{T}$$

$$X_k = A_k e^{j\phi_k}$$

$$x(t) = X_0 + \sum_{k=1}^N \left\{ \frac{1}{2} X_k e^{j2\pi k f_0 t} + \frac{1}{2} X_k^* e^{-j2\pi k f_0 t} \right\}$$

Define FUNDAMENTAL FREQ

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi k f_0 t + \phi_k)$$


$$f_k = k f_0 \quad (\omega_0 = 2\pi f_0)$$

$$f_0 = \frac{1}{T_0}$$

f_0 = fundamental Frequency (largest)

T_0 = fundamental Period (shortest)

Harmonic Signal (3 Freqs)




What is the fundamental frequency? **10 Hz**

13

POP QUIZ: FUNDAMENTAL

• Here's another spectrum:

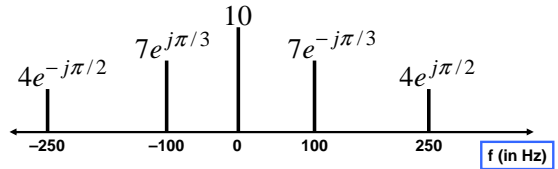


What is the fundamental frequency?

100 Hz ? **50 Hz ?**


14

IRRATIONAL SPECTRUM

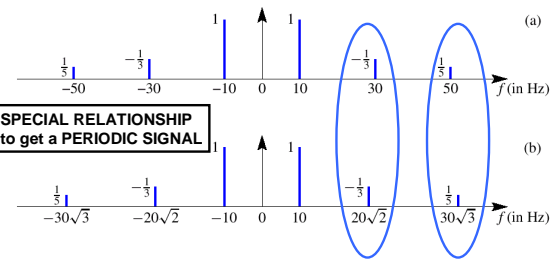


15

Harmonic Signal (3 Freqs)

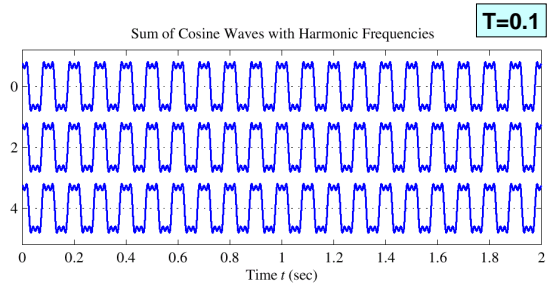

16

NON-Harmonic Signal

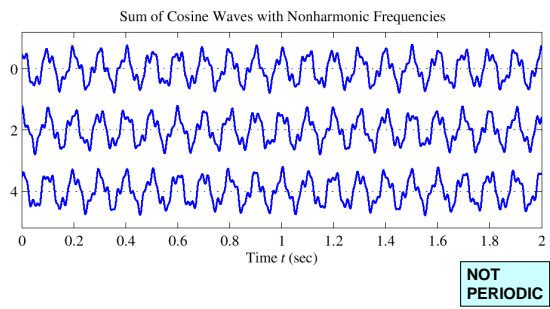

17

FREQUENCY ANALYSIS

• **Now, a much HARDER problem**

• Given a recording of a song, have the computer write the music




• Can a machine extract frequencies?

- Yes, if we COMPUTE the spectrum for $x(t)$
- During short intervals

18


Time-Varying FREQUENCIES Diagram

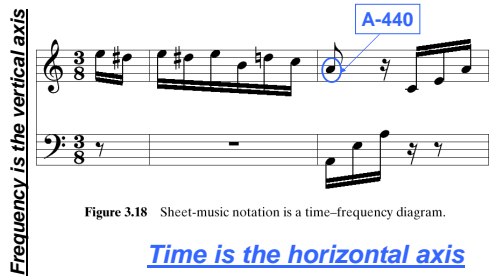

19

SIMPLE TEST SIGNAL

- C-major SCALE: stepped frequencies
- Frequency is constant for each note

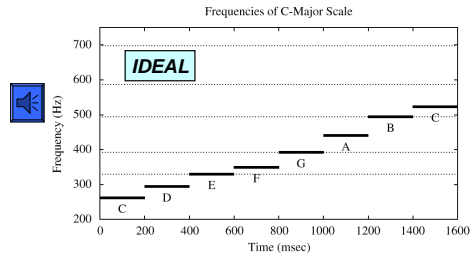


20

SPECTROGRAM

- SPECTROGRAM Tool
 - MATLAB function is `specgram.m`
 - SP-First has `plotspec.m` & `spectgr.m`
- **ANALYSIS** program
 - Takes $x(t)$ as input &
 - Produces spectrum values X_k
 - Breaks $x(t)$ into **SHORT TIME SEGMENTS**
 - Then uses the FFT (**Fast Fourier Transform**)

21

SPECTROGRAM EXAMPLE

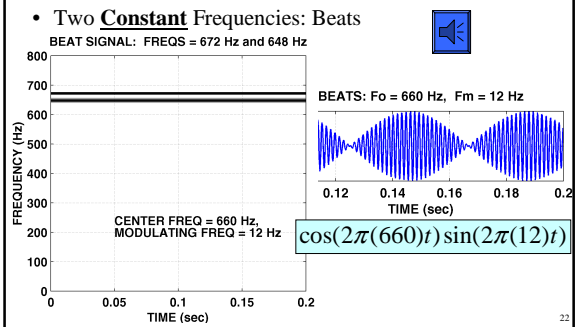

22

AM Radio Signal

- Same as BEAT Notes

$$\cos(2\pi(660)t) \sin(2\pi(12)t)$$

$$\frac{1}{2} (e^{j2\pi(660)t} + e^{-j2\pi(660)t}) \frac{1}{2j} (e^{j2\pi(12)t} - e^{-j2\pi(12)t})$$

$$\frac{1}{4j} (e^{j2\pi(672)t} - e^{-j2\pi(672)t} - e^{j2\pi(648)t} + e^{-j2\pi(648)t})$$

$$\frac{1}{2} \cos(2\pi(672)t - \frac{\pi}{2}) + \frac{1}{2} \cos(2\pi(648)t + \frac{\pi}{2})$$

23

SPECTRUM of AM (Beat)

- 4 complex exponentials in AM:



What is the fundamental frequency?


648 Hz ?

24 Hz ?

24


STEPPED FREQUENCIES

- C-major SCALE: successive sinusoids
 - Frequency is constant for each note

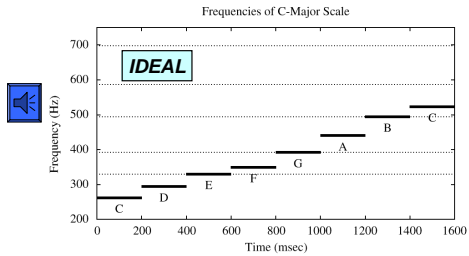


25

SPECTROGRAM of C-Scale

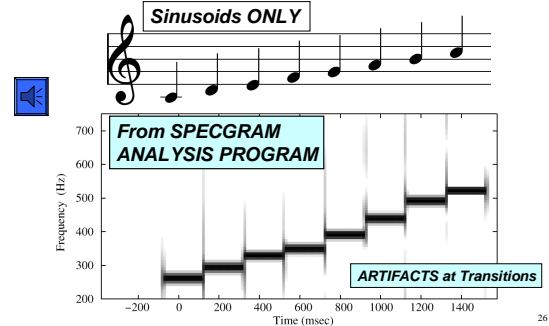

26

Spectrogram of LAB SONG

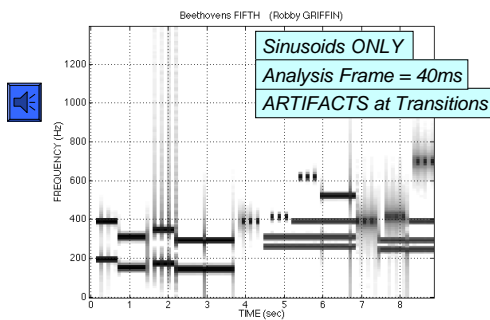

27

Time-Varying Frequency

- Frequency can change vs. time
 - Continuously, not stepped
- **FREQUENCY MODULATION (FM)**

$$x(t) = \cos(2\pi f_c t + v(t))$$

VOICE

- CHIRP SIGNALS
 - Linear Frequency Modulation (LFM)



28

New Signal: Linear FM

- Called Chirp Signals (LFM)
 - Quadratic phase

QUADRATIC

$$x(t) = A \cos(\alpha t^2 + 2\pi f_0 t + \varphi)$$

- Freq will change LINEARLY vs. time
 - Example of Frequency Modulation (FM)
 - Define “instantaneous frequency”

29

INSTANTANEOUS FREQ

- Definition

$$x(t) = A \cos(\psi(t))$$

$$\Rightarrow \omega_i(t) = \frac{d}{dt} \psi(t)$$

Derivative of the “Angle”

- For Sinusoid:

$$x(t) = A \cos(2\pi f_0 t + \varphi)$$

$$\psi(t) = 2\pi f_0 t + \varphi$$

Makes sense

$$\Rightarrow \omega_i(t) = \frac{d}{dt} \psi(t) = 2\pi f_0$$

30

INSTANTANEOUS FREQ of the Chirp

- Chirp Signals have Quadratic phase
- Freq will change **LINEARLY** vs. time


$$x(t) = A \cos(\alpha t^2 + \beta t + \varphi)$$

$$\Rightarrow \psi(t) = \alpha t^2 + \beta t + \varphi$$

$$\Rightarrow \omega_i(t) = \frac{d}{dt} \psi(t) = 2\alpha t + \beta$$


31

CHIRP SPECTROGRAM

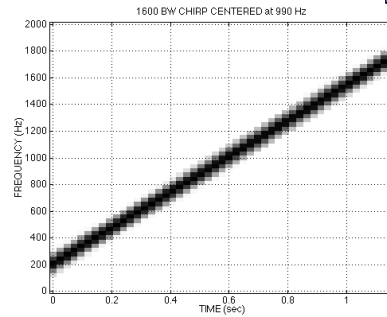

32

CHIRP WAVEFORM

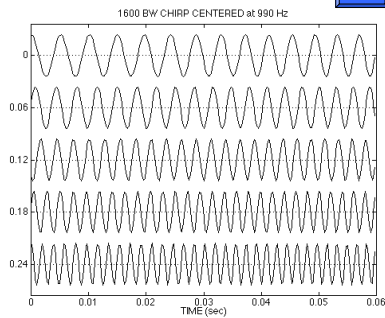

33

OTHER CHIRPS

$\psi(t)$ can be anything:

$$x(t) = A \cos(\alpha \cos(\beta t) + \varphi)$$


$$\Rightarrow \omega_i(t) = \frac{d}{dt} \psi(t) = -\alpha \beta \sin(\beta t)$$

$\psi(t)$ could be speech or music:

– FM radio broadcast

34

SINE-WAVE FREQUENCY MODULATION (FM)

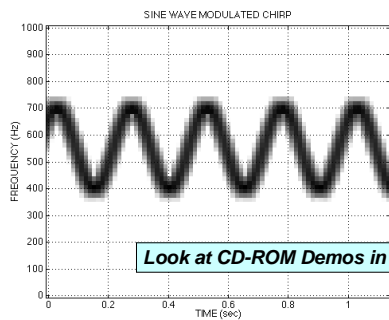

35