

Digital Signal Processing

Prof. Nizamettin AYDIN

naydin@yildiz.edu.tr

<http://www.yildiz.edu.tr/~naydin>

1

Digital Signal Processing

Lecture 6

Fourier Series Coefficients

2

License Info for SPFirst Slides

- This work released under a [Creative Commons License](#) with the following terms:
- Attribution
 - The licensor permits others to copy, distribute, display, and perform the work. In return, licensees must give the original authors credit.
- Non-Commercial
 - The licensor permits others to copy, distribute, display, and perform the work. In return, licensees may not use the work for commercial purposes—unless they get the licensor's permission.
- Share Alike
 - The licensor permits others to distribute derivative works only under a license identical to the one that governs the licensor's work.
- [Full Text of the License](#)
- *This (hidden) page should be kept with the presentation*

3

READING ASSIGNMENTS

- This Lecture:
 - **Fourier Series in Ch 3, Sects 3-4, 3-5 & 3-6**
 - Replaces pp. 62-66 in Ch 3 in DSP First
 - Notation: a_k for Fourier Series
- Other Reading:
 - Next Lecture: More Fourier Series

4

LECTURE OBJECTIVES

- Work with the Fourier Series Integral

$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi k/T_0)t} dt$$


- **ANALYSIS** via Fourier Series
 - For **PERIODIC** signals: $x(t+T_0) = x(t)$
 - Later: spectrum from the Fourier Series

5

HISTORY

- Jean Baptiste Joseph Fourier
 - 1807 thesis (memoir)
 - On the Propagation of Heat in Solid Bodies
 - Heat !
 - Napoleonic era
- <http://www-groups.dcs.st-and.ac.uk/~history/Mathematicians/Fourier.html>

6




Joseph Fourier
lived from 1768 to 1830

Fourier studied the mathematical theory of heat conduction. He established the partial differential equation governing heat diffusion and solved it by using infinite series of trigonometric functions.

Find out more at:
<http://www.history.mcs.st-andrews.ac.uk/history/mathematicians/Fourier.html>

SPECTRUM DIAGRAM

- Recall Complex Amplitude vs. Freq

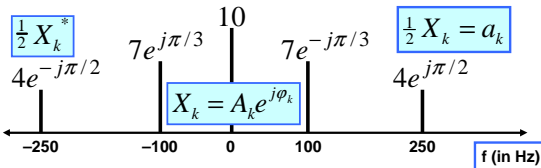

$$X_k = A_k e^{j\phi_k}$$

$$x(t) = a_0 + \sum_{k=1}^N \{ a_k e^{j2\pi f_k t} + a_k^* e^{-j2\pi f_k t} \}$$

Harmonic Signal

$$x(t) = \sum_{k=-\infty}^{\infty} a_k e^{j2\pi k f_0 t}$$

PERIOD/FREQUENCY of COMPLEX EXPONENTIAL:

$$2\pi(f_0) = \omega_0 = \frac{2\pi}{T_0} \quad \text{or} \quad T_0 = \frac{1}{f_0}$$

Fourier Series Synthesis

$$x(t) = \sum_{k=-\infty}^{\infty} a_k e^{j2\pi k f_0 t}$$


$$a_k = \frac{1}{2} X_k = \frac{1}{2} A_k e^{j\phi_k}$$

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi k f_0 t + \phi_k)$$

COMPLEX AMPLITUDE

$$X_k = A_k e^{j\phi_k}$$

Harmonic Signal (3 Freqs)

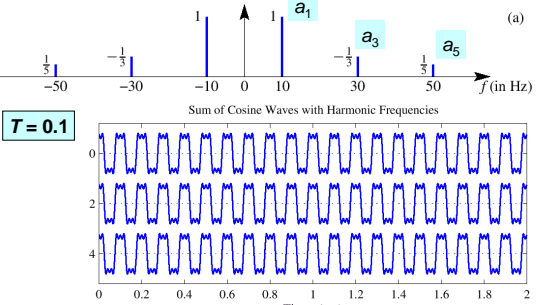

Sum of Cosine Waves with Harmonic Frequencies

$T = 0.1$

SYNTHESIS vs. ANALYSIS

- SYNTHESIS**
 - Easy
 - Given (ω_k, A_k, ϕ_k) create $x(t)$
 - Synthesis can be HARD
 - Synthesize Speech so that it sounds good
- ANALYSIS**
 - Hard
 - Given $x(t)$, extract (ω_k, A_k, ϕ_k)
 - How many?
 - Need algorithm for computer

STRATEGY: $x(t) \rightarrow a_k$

- **ANALYSIS**

- Get representation from the signal
- Works for **PERIODIC** Signals

- Fourier Series

- Answer is: an **INTEGRAL** over one period

$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j\omega_0 k t} dt$$

13

INTEGRAL Property of $\exp(j)$

- INTEGRATE over ONE PERIOD

$$\int_0^{T_0} e^{-j(2\pi/T_0)mt} dt = \frac{T_0}{-j2\pi m} e^{-j(2\pi/T_0)mt} \Big|_0^{T_0}$$

$$= \frac{T_0}{-j2\pi m} (e^{-j2\pi m} - 1)$$

$$\int_0^{T_0} e^{-j(2\pi/T_0)mt} dt = 0 \quad m \neq 0 \quad \omega_0 = \frac{2\pi}{T_0}$$

14

ORTHOGONALITY of $\exp(j)$

- PRODUCT of $\exp(+j)$ and $\exp(-j)$

$$\frac{1}{T_0} \int_0^{T_0} e^{j(2\pi/T_0)\ell t} e^{-j(2\pi/T_0)kt} dt = \begin{cases} 0 & k \neq \ell \\ 1 & k = \ell \end{cases}$$

$$\frac{1}{T_0} \int_0^{T_0} e^{j(2\pi/T_0)(\ell-k)t} dt$$

15

Isolate One FS Coefficient

$$x(t) = \sum_{k=-\infty}^{\infty} a_k e^{j(2\pi/T_0)kt}$$

$$\frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi/T_0)\ell t} dt = \frac{1}{T_0} \int_0^{T_0} \left(\sum_{k=-\infty}^{\infty} a_k e^{j(2\pi/T_0)kt} \right) e^{-j(2\pi/T_0)\ell t} dt$$

$$\frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi/T_0)\ell t} dt = \sum_{k=-\infty}^{\infty} a_k \left(\frac{1}{T_0} \int_0^{T_0} e^{j(2\pi/T_0)kt} e^{-j(2\pi/T_0)\ell t} dt \right) = a_\ell$$

$$\Rightarrow a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi/T_0)kt} dt$$


Integral is zero except for $k = \ell$

16

SQUARE WAVE EXAMPLE

$$x(t) = \begin{cases} 1 & 0 \leq t < \frac{1}{2}T_0 \\ 0 & \frac{1}{2}T_0 \leq t < T_0 \end{cases}$$

for $T_0 = 0.04$ sec.



17

FS for a SQUARE WAVE $\{a_k\}$

$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi/T_0)kt} dt \quad (k \neq 0)$$

$$a_k = \frac{1}{.04} \int_0^{.02} 1 e^{-j(2\pi/.04)kt} dt = \frac{1}{.04(-j2\pi k/.04)} e^{-j(2\pi/.04)kt} \Big|_0^{.02}$$

$$= \frac{1}{(-j2\pi k)} (e^{-j(\pi)k} - 1) = \frac{1 - (-1)^k}{j2\pi k}$$

18

DC Coefficient: a_0

$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi/T_0)kt} dt \quad (k=0)$$

$$a_0 = \frac{1}{T_0} \int_0^{T_0} x(t) dt = \frac{1}{T_0} (\text{Area})$$

$$a_0 = \frac{1}{.04} \int_0^{.02} 1 dt = \frac{1}{.04} (.02 - 0) = \frac{1}{2}$$

19

Fourier Coefficients a_k

- a_k is a function of k
 - Complex Amplitude for k -th Harmonic
 - This one doesn't depend on the period, T_0


$$a_k = \frac{1 - (-1)^k}{j2\pi k} = \begin{cases} \frac{1}{j\pi k} & k = \pm 1, \pm 3, \dots \\ 0 & k = \pm 2, \pm 4, \dots \\ \frac{1}{2} & k = 0 \end{cases}$$

20

Spectrum from Fourier Series

$$\omega_0 = 2\pi / (0.04) = 2\pi(25)$$

$$a_k = \begin{cases} \frac{-j}{\pi k} & k = \pm 1, \pm 3, \dots \\ 0 & k = \pm 2, \pm 4, \dots \\ \frac{1}{2} & k = 0 \end{cases}$$

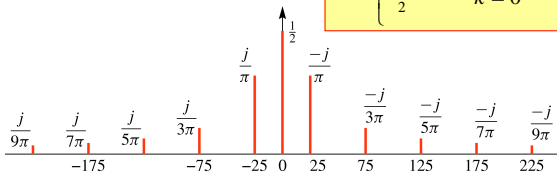

21

Fourier Series Integral

- HOW do you determine a_k from $x(t)$?

$$a_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j(2\pi/T_0)kt} dt$$

Fundamental Frequency $f_0 = 1/T_0$

$a_{-k} = a_k^*$ when $x(t)$ is real

$$a_0 = \frac{1}{T_0} \int_0^{T_0} x(t) dt \quad (\text{DC component})$$

22