

BLM5207 Computer Organization

Prof. Dr. Nizamettin AYDIN
naydin@yildiz.edu.tr
<http://www3.yildiz.edu.tr/~naydin>

Addressing Modes and Formats

1


Addressing Modes

- Immediate
- Direct
- Indirect
- Register
- Register Indirect
- Displacement (Indexed)
- Stack

2

Immediate Addressing

- Operand is part of instruction
- Operand = address field
- e.g. **ADD 5**
 - Add 5 to contents of accumulator
 - Here 5 is operand
- No memory reference to fetch data
- Fast
- Limited range




3

Direct Addressing

- Address field contains address of operand
- Effective address (EA) = address field (A)
- e.g. **ADD A**
 - Add contents of cell A to accumulator
 - Look in memory at address A for operand
- Single memory reference to access data
- No additional calculations to work out effective address
- Limited address space

4

Direct Addressing Diagram

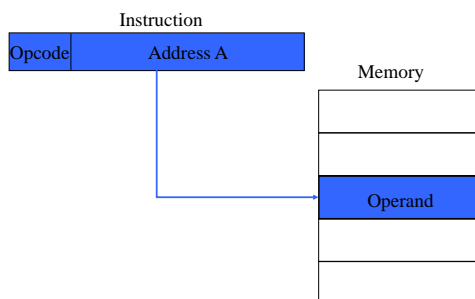


5

Indirect Addressing (1)

- Memory cell pointed to by address field contains the address of (pointer to) the operand
- Large address space
- 2^n where $n = \text{word length}$
- May be nested, multilevel, cascaded
- Multiple memory accesses to find operand
- Hence slower

6

Indirect Addressing Diagram

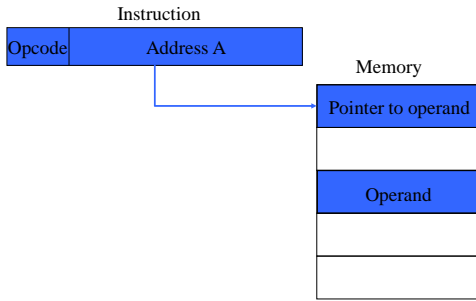


7

Register Addressing (1)

- Operand is held in register named in address field
- $EA = R$
- Limited number of registers
- Very small address field needed
 - Shorter instructions
 - Faster instruction fetch
- No memory access
- Very fast execution
- Very limited address space
- Multiple registers helps performance
 - Requires good assembly programming or compiler writing

8

Register Addressing Diagram

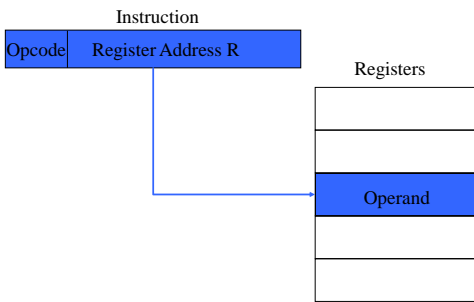


9

Register Indirect Addressing

- Operand is held in memory cell pointed to by contents of register R named in address field
- $EA = (R)$
- Large address space (2^n)
- One fewer memory access than indirect addressing

10

Register Indirect Addressing Diagram

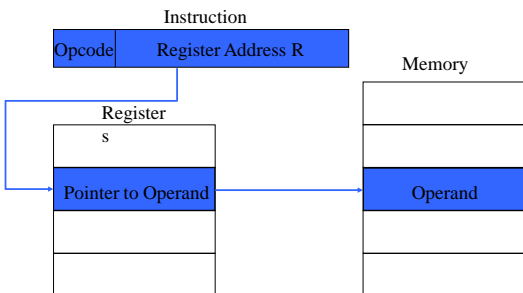

11

Displacement Addressing

- $EA = A + (R)$
- Address field hold two values
 - A = base value
 - R = register that holds displacement
 - or vice versa

12

7

8


9

10

11

12

Displacement Addressing Diagram

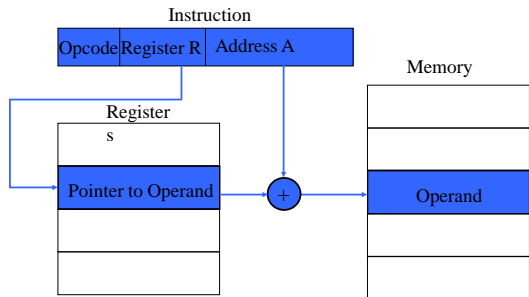

13

Relative Addressing

- A version of displacement addressing
- $R = \text{Program counter (PC)}$
- $EA = A + (PC)$
- i.e. get operand from A cells from current location pointed to by PC

14

Base-Register Addressing

- A holds displacement
- R holds pointer to base address
- R may be explicit or implicit
- e.g. segment registers in 80x86

15

Indexed Addressing

- $A = \text{base}$
- $R = \text{displacement}$
- $EA = A + R$
- Good for accessing arrays
 - $EA = A + R$
 - $R++$

16

Combinations

- Postindex
- $EA = (A) + (R)$
- Preindex
- $EA = (A+(R))$

17

Stack Addressing

- Operand is (implicitly) on top of stack
- e.g.
 - **ADD** Pop top two items from stack and add

18

Summary of basic addressing modes

Mode	Algorithm	Principal Advantage	Principal Disadvantage
Immediate	Operand = A	No memory reference	Limited operand magnitude
Direct	EA = A	Simple	Limited address space
Indirect	EA = (A)	Large address space	Multiple memory references
Register	EA = R	No memory reference	Limited address space
Register indirect	EA = (R)	Large address space	Extra memory reference
Displacement	EA = A + (R)	Flexibility	Complexity
Stack	EA = top of stack	No memory reference	Limited applicability

19

19

Instruction Formats

- Layout of bits in an instruction
- Includes opcode
- Includes (implicit or explicit) operand(s)
- Usually more than one instruction format in an instruction set

20

20

Instruction Length

- Affected by and affects:
 - Memory size
 - Memory organization
 - Bus structure
 - CPU complexity
 - CPU speed
- Trade off between powerful instruction repertoire and saving space

21


21

Allocation of Bits

- Number of addressing modes
- Number of operands
- Register versus memory
- Number of register sets
- Address range
- Address granularity

22

22



23

23